

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and more.

### CONSTRUCTION

Features a white acrylic diffuser and is available in 11", 14" and 20" sizes. Hidden cam-latches provide easy diffuser removal for installation and maintenance.

### OPTICS

11" units produce 1100 lumens, 14" units produce 1600 lumens, and 20" units produce 4000 lumens 50,000 hours life, and 20" units at 30,000 hours life.

### ELECTRICAL

Fixture operates at 120 volts, 60 Hz.

11" Standard input = 16 watts, 69 lumens per watt.

14" Standard input = 24 watts, 67 lumens per watt.

20" Standard input = 44 watts, 90 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

### INSTALLATION

All mounting hardware included.

### LISTINGS

UL Certified to US and Canadian standards and listed suitable for damp locations. ENERGY STAR® certified

### WARRANTY

5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/resources/terms-and-conditions](http://www.acuitybrands.com/resources/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

# LED Low Profile Round

## Flush Mount



HIGH-PERFORMANCE LED



### Specifications

Height:	FMLRL 11 – 2-7/8 (7.3)
	FMLRL 14 – 3-1/8 (7.9)
	FMLRDL 20-4 (10.2)
Width:	FMLRL 11 – 11 (27.9)
	FMLRL 14 – 13-11/16 (34.7)
	FMLRDL 20-20 (5.8)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

Example: FMLRL 11 14840

Series Module/CRI	Color temperature
FMLRL 11 148      11" LED Low Profile Round Flush Mount, > 80 CRI	30      3000 K
FMLRL 14 208      14" LED Low Profile Round Flush Mount, > 80 CRI	40      4000 K <sup>1</sup>
FMLRDL 20 358      20" LED Low Profile Round Flush Mount, > 80 CRI	30      3000 K

<b>Accessories:</b> Order as separate catalog number.	
DFMLRL11	11" LED low profile round diffuser
DFMLRL14	14" LED low profile round diffuser

### Notes

1 4000 K only stocked in 20".

# LED Low Profile Round Flush Mount

## LIGHTING FACTS

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

Light Output (Lumens)	1100
Watts	16
Lumens per Watt (Efficacy)	69

---

Color Accuracy Color Rendering Index (CRI)	85
---	----

---

Light Color  
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

Warm White | Bright White | Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-6Q23FJ (3/18/2013)  
Model Number: FMLRL 11 14840  
Type: Surface-mounted fixture (other)

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

Light Output (Lumens)	1600
Watts	24
Lumens per Watt (Efficacy)	67

---

Color Accuracy Color Rendering Index (CRI)	85
---	----

---

Light Color  
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

Warm White | Bright White | Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-TG3BX1 (3/18/2013)  
Model Number: FMLRL 14 20840  
Type: Surface-mounted fixture (other)

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

Light Output (Lumens)	3970
Watts	44
Lumens per Watt (Efficacy)	90.23

---

Color Accuracy Color Rendering Index (CRI)	80
---	----

---

Light Color  
Correlated Color Temperature (CCT) **4000 (Bright White)**

2700K 3000K 4500K 6500K

Warm White | Bright White | Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-BGJT1M (10/17/2016)  
Model Number: FMLRDL 20 35840  
Type: Luminaire - Decorative

### SUGGESTED DIMMERS


The FMLRL is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600


# LED Low Profile Round Flush Mount

## PHOTOMETRICS

FMLRL 11 14840, test no. LTL23006, tested in accordance to IESNA LM-79.

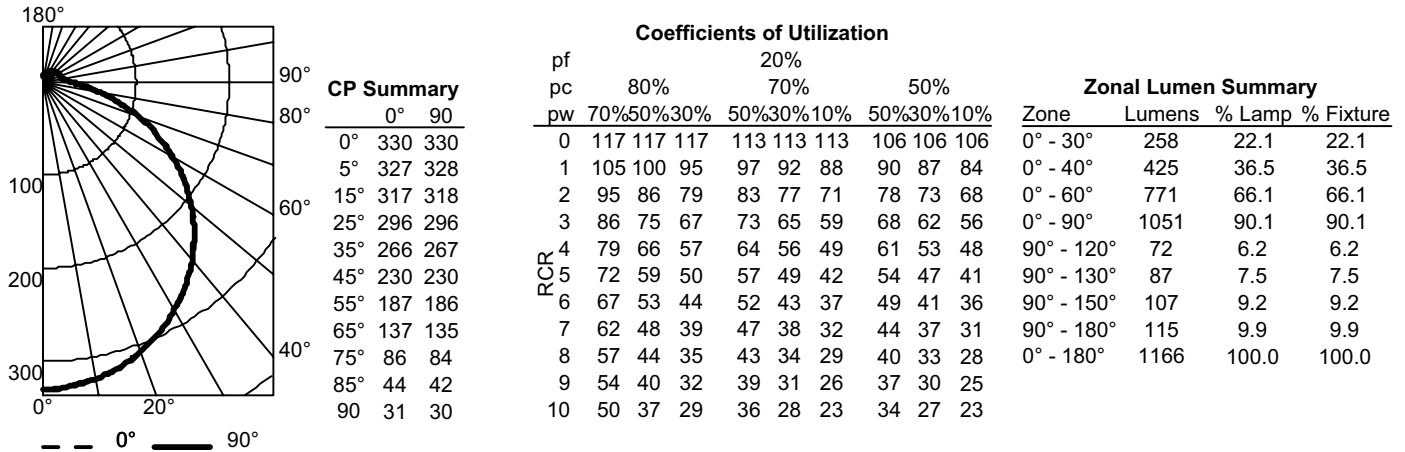

FMLRL 14 20840, test no. LTL23005, tested in accordance to IESNA LM-79.

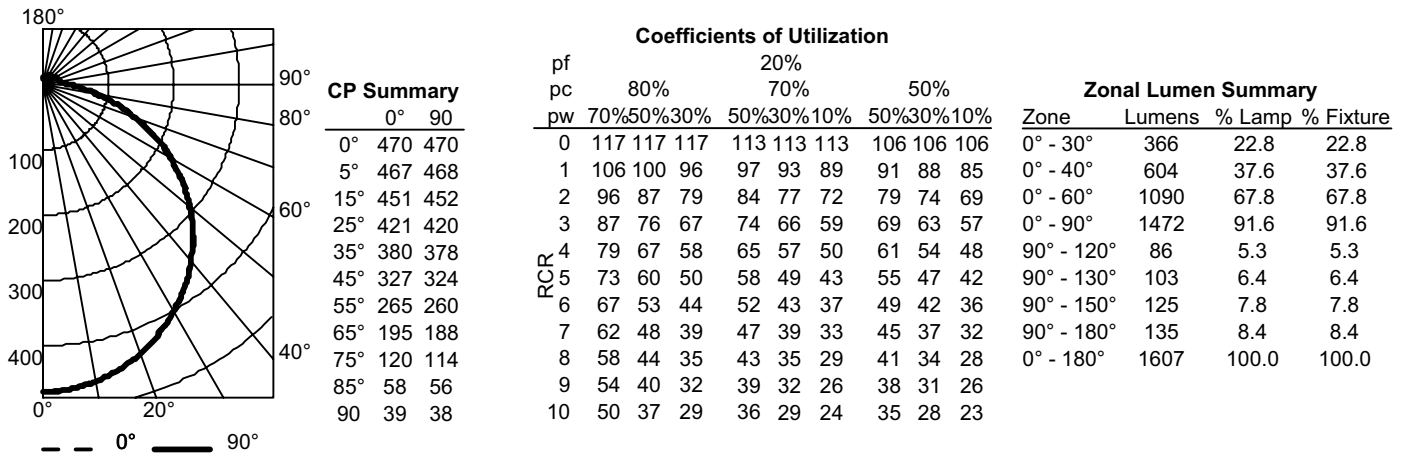

FMLRDL 20 35840, test no. ISF 32370, tested in accordance to IESNA LM-79.

